

ART. 9335 SIM. ISO 7380-2

Vite a testa bombata piana con cava esagonale, flangiata


Hexagon socket button head screw, with flange

Disponibile/Disponibile

A2



A4

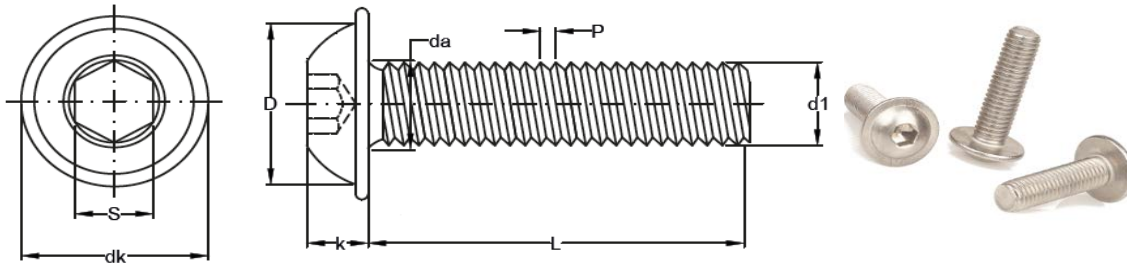

Viti non marcate/screws not marked

P	0,50	0,70	0,80	1,00	1,25	1,50
S min.	2,02	2,52	3,02	4,02	5,02	6,02
da max.	3,6	4,7	5,7	6,8	9,2	11,2
k	1,40/1,65	1,95/2,20	2,50/2,75	3,00/3,30	4,10/4,40	5,20/5,50
D	5,40/5,70	7,24/7,60	9,04/9,60	9,97/10,60	13,47/14,10	16,1/16,5
dk	6,65/6,90	8,90/9,40	11,20/11,80	13,00/13,60	17,00/17,80	21,06/21,9
l/d1	M3	M4	M5	M6	M8	M10
5						
6						
8						
10						
12						
16						
18						
20						
25						
30						
35						
40						
50						
55						
60						

last edit 14/06/2019

DRAWING N. 1019