


DIN 7981 C sim. UNI 6954 EN ISO 7049


Vite autofilettante a testa cilindrica bombata con impronta croce H (Phillips), tipo C (punta conica)



DIN 7981 C sim. UNI 6954 EN ISO 7049

Cross recessed H (Phillips) pan head tapping screws, type C (cone point)

Disponibile/Available

 Aisi 304 / A2

 Aisi 316 / A4

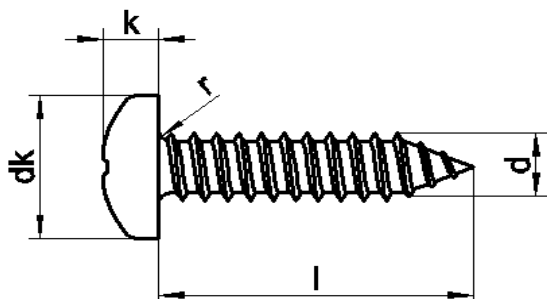

dk	4,2	5,6	6,9	7,5	8,2	9,5	10,8	12,5
k min.	1,55	1,95	2,35	2,55	2,75	3,25	3,65	4,25
k max.	1,8	2,2	2,6	2,8	3,05	3,55	3,95	4,55
r max.	0,3	0,4	0,5	0,5	0,6	0,7	0,8	0,9
[phillips]	P 1	P 1	P 2	P 2	P 2	P 2	P 3	P 3
l/Ø	ST2,2	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
4,5								
6,5								
9,5								
13								
16								
19								
22								
25								
32								
38								
45								
50								
55								
60								
70								
80								
90								
100								
120								