


sim. ISO 7045 - **DIN 7985 H**
Pan head screws
 with cross recess H (Phillips)

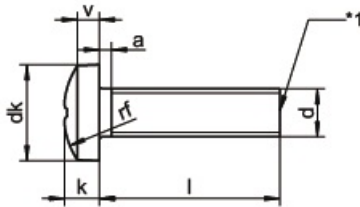

	3,2	4,0	5,0	6,0	8,0	10,0	12,0	16,0
dk	1,3	1,6	2,0	2,4	3,1	3,8	4,6	6,0
k	0,8	1,1	1,3	1,6	2,0	2,5	3,0	3,7
v	0,7	0,8	0,9	1,0	1,4	1,6	2,0	2,5
a	3	4	5	6	8	10	12	16
rf	15	16	18	19	22	25	28	34
b min.	P 0	P 1	P 1	P 1	P 2	P 2	P 3	P 4
⊕								
Length / Ø	M1,6	M2	M2,5	M3	M4	M5	M6	M8
3	▲ ●	▲ ●	▲ ●					
4	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
5	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
6	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●		
8	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
10	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
12	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
14	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
16	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
18	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
20		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
22			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
25			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
28			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
30			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
35				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
40				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
55				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
65					▲ ●	▲ ●	▲ ●	▲ ●
70					▲ ●	▲ ●	▲ ●	▲ ●
80					▲ ●	▲ ●	▲ ●	▲ ●
90					▲ ●	▲ ●	▲ ●	▲ ●
100					▲ ●	▲ ●	▲ ●	▲ ●