


*Vite a testa svasata piana con cava esagonale**ISO 10642 sim. ex UNI 5933 DIN 7991**Hexagon socket countersunk head screw*

Disponibile/Available

Aisi 304 / A2



Aisi 316 / A4

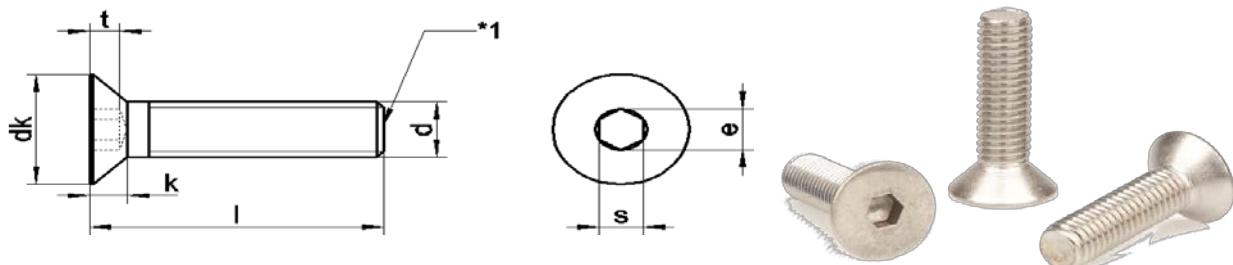

dk	6,72	8,96	11,2	13,44	17,92	22,4	26,88	33,6	40,32	39
k	1,86	2,48	3,1	3,72	4,96	6,02	7,44	8,8	10,16	14
s	2	2,5	3	4	5	6	8	10	12	14
b	12	14	16	18	22	26	30	38	46	54
t	1,2	1,8	2,3	2,5	3,5	4,4	4,6	5,3	5,9	10,3
e	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43	11,43	16
[Allen-6k]	2	2,5	3	4	5	6	8	10	12	14
I/Ø	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24
5										
6										
8										
10										
12										
14										
16										
18										
20										
25										
30										
35										
40										
45										
50										
55										

segue a pag.2


continued on page 2

Vite a testa svasata piana con cava esagonale

ISO 10642 sim. ex UNI 5933 DIN 7991

Hexagon socket countersunk head screw

Disponibile/Available

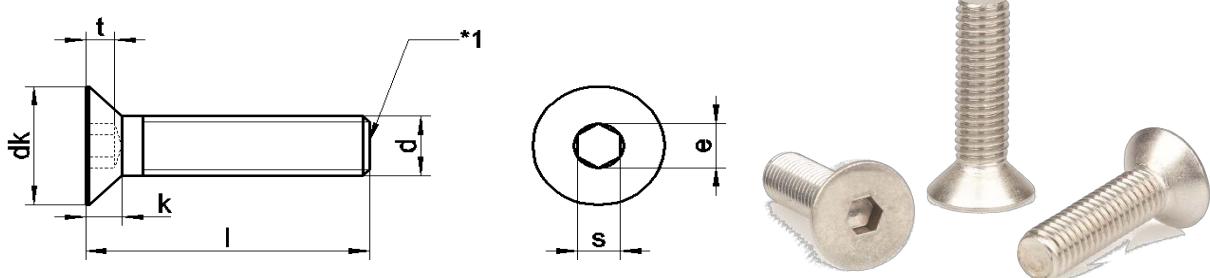Aisi 304 / A2 Aisi 316 / A4 

dk	6,72	8,96	11,2	13,44	17,92	22,4	26,88	33,6	40,32	39	
k	1,86	2,48	3,1	3,72	4,96	6,02	7,44	8,8	10,16	14	
s	2	2,5	3	4	5	6	8	10	12	14	
b	12	14	16	18	22	26	30	38	46	54	
t	1,2	1,8	2,3	2,5	3,5	4,4	4,6	5,3	5,9	10,3	
e	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43	11,43	16	
[Allen-6k]	2	2,5	3	4	5	6	8	10	12	14	
l/Φ	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24	
60		 	 	 	 	 	 	 	 	 	
65		 	 	 	 	 	 	 	 	 	
70		 	 	 	 	 	 	 	 	 	
75			 	 	 	 	 	 	 	 	
80				 	 	 	 	 	 	 	
90					 	 	 	 	 	 	
100					 	 	 	 	 	 	
110						 	 	 	 	 	
120						 	 	 	 	 	
130							 	 	 	 	 
140							 	 	 	 	 
150							 	 	 	 	 
160							 	 	 	 	 
170							 	 	 	 	 
180							 	 	 	 	 