


DIN 965 H - sim. ISO 7046

Countersunk flat head screws

with cross recess H (Phillips)

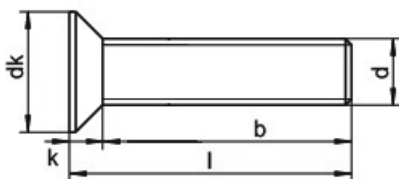

dk	3,0	3,8	4,7	5,6	7,5	9,2	11,0	14,5	18,0
k max.	0,96	1,20	1,50	1,65	2,20	2,50	3,00	4,00	5,00
b min.	15	16	18	19	22	25	28	34	40
⊕	P0	P1	P1	P1	P2	P2	P3	P4	P4
Length / Ø	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10
3	▲●	▲●							
4	▲●	▲●		▲●					
5	▲●	▲●	▲●	▲●	▲●				
6	▲●	▲●	▲●	▲●	▲●	▲●			
8	▲●	▲●	▲●	▲●	▲●	▲●	▲●		
10	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
12	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
14	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
16	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
18		▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
20		▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
22				▲●	▲●	▲●	▲●	▲●	▲●
25				▲●	▲●	▲●	▲●	▲●	▲●
30				▲●	▲●	▲●	▲●	▲●	▲●
35				▲●	▲●	▲●	▲●	▲●	▲●
40				▲●	▲●	▲●	▲●	▲●	▲●
45				▲●	▲●	▲●	▲●	▲●	▲●
50				▲●	▲●	▲●	▲●	▲●	▲●
55				▲●	▲●	▲●	▲●	▲●	▲●
60				▲●	▲●	▲●	▲●	▲●	▲●
65					▲●	▲●	▲●	▲●	▲●
70					▲●	▲●	▲●	▲●	▲●
75					▲●	▲●	▲●	▲●	▲●
80					▲●	▲●	▲●	▲●	▲●
85					▲●	▲●	▲●	▲●	▲●
90					▲●	▲●	▲●	▲●	▲●
95					▲●	▲●	▲●	▲●	▲●
100					▲●	▲●	▲●	▲●	▲●

■ A1 / ▲ A2 / ● A4